

01/11/99



OSTROLENK, FABER, GERB & SOFFEN, LLP

Attorneys at Law

1180 Avenue of the Americas  
New York, New York 10036-8403

(212) 382-0700

Telex  
23 6925

Facsimile  
(212) 382-0888

Cable  
Ostrofaber NewYork

Express Mail #EL010251811US

Asst. Commissioner of Patents and Trademarks  
Washington, DC 20231

OFGS File No. : P/3281-5  
Inventor : Yoshihiro ONO  
Title : VOICE SWITCHING SYSTEM CAPABLE OF IMPROVING A  
QUALITY OF CONVERSATION  
Assignee : NEC Corporation

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

- 31 Pages of Specification including Abstract and Claims
- 7 Numbered Claims Calculated as 7 Claims for Fee Purposes
- 6 Sheets of Drawing Containing Figures 1 to 8.
- X Declaration and Power of Attorney
- X Priority is Claimed under 35 U.S.C. §119:
- Convention Date January 9, 1998 for Japan Appln. S.N. 10-015122
- X Certified Priority Application
- X PTO-1449 with 3 references
- X Assignment
- X Return-Addressed Post Card

OFGS Check No. 7175, which includes the fee of \$800.00, calculated as follows:

Basic Filing Fee: . . . . . \$ 760.00  
Additional Filing Fees:  
Total Number of Claims in Excess of 20, times \$18: . . . .  
Number of Independent Claims in Excess of 3, times \$78: . .  
One or More Multiple Dependent Claims: Total \$260. . . .  
Total Filing Fees or . . . . . 760.00  
Total Filing Fee Reduced 50% for Small Entity: . . . . .  
Assignment Recording Fee: \$40 . . . . . 40.00  
TOTAL Filing Fee and Assignment Recording Fee: . . . . . \$ 800.00

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

Respectfully submitted,

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL010251811US) in an envelope addressed to: Asst. Commissioner of Patents and Trademarks, Washington, D.C. 20231, on January 11, 1999:

Dorothy Jenkins

Name of Person Mailing Correspondence

*Dorothy Jenkins*

Signature

January 11, 1999

Date of Signature

*Steven I. Weisburd*  
Steven I. Weisburd

Registration No.: 27,409

OSTROLENK, FABER, GERB & SOFFEN, LLP

1180 Avenue of the Americas

New York, New York 10036-8403

Telephone: (212) 382-0700

VOICE SWITCHING SYSTEM CAPABLE OF IMPROVING A QUALITY OF  
CONVERSATION

Background of the Invention:

This invention relates to a voice switching  
5 system for use in a teleconference system, a hand-free  
telephone system, and the like.

An example of such a voice switching system used  
conventionally in an electronic conference system is  
exemplified, as a first prior art, in unexamined Japanese  
10 Patent Publication No.Hei 1 245661, namely, 245661/1989.  
The publication paper discloses a howling compression device  
which compares a transmission signal level with a reception  
signal level so as to detect whether or not a difference  
between both levels exceeds a predetermined value. When the  
15 difference exceeds the predetermined value, the howling  
compression device either the transmission signal or the  
reception signal which is detected to be lower in level. On  
the other hand, the howling compression device prevents an  
echo canceller from amending an estimated impulse response,  
20 when the transmission signal level is detected to be higher  
than the reception signal level.

Another example of such a conventional voice  
switching system is exemplified, as a second prior art, in  
unexamined Japanese Patent Publication No.Hei 6-253001,  
25 namely, 253001/1994. The publication paper discloses a  
voice control circuit which prevents a voice system of a  
teleconference system from an erroneous operation due to a  
change of a transmitting input level dependent on an amount

of echo suppression by an echo canceller. For this purpose, in the voice control circuit, from an aforehead section of an echo canceller, an input level of a transmission signal is detected by a transmitting input level detector while a  
 5 reception signal level is detected by a receiving input level detector. A detection output of the transmitting input level detector is then compared with that of the receiving input level detector by the use of a comparator. Dependent on a result of the comparison, an amount of attenuation by  
 10 a transmission signal attenuator or a reception signal attenuator is adjusted in the voice control circuit disclosed in the publication paper.

Still another example of such a conventional voice switching system is exemplified, as a third prior art,  
 15 in unexamined Japanese Patent Publication No. Hei 4-22249, namely, 22249/1992. The publication paper discloses a loudspeaking telephone system which controls an amount of attenuation of a variable attenuator only by voices through a line in which an echo is cancelled. Namely, in the  
 20 loudspeaking telephone system, an output of a microphone is attenuated by a primary variable attenuator, and then, an output of the primary variable attenuator is sent to a line. A voice received through the line is attenuated by a secondary variable attenuator to be supplied to a speaker. Thus, an  
 25 amount of attenuation of the primary and the secondary variable attenuators are controlled by the received voice of which an echo is cancelled in the line.

However, all of a first, a second or a third prior

art disclosed in each of the above-mentioned publication  
papers are such techniques as suppressing howling. As will  
later be described more in detail, an unmatched timing is  
inevitably caused to occur between a signal to be attenuated  
3 and a reference signal for determining an amount of  
attenuation, when a certain delay exists in either the signal  
to be attenuated or the reference signal. As a result, an  
attenuation is inserted within a conversation at an  
unappropriate timing to deteriorate a quality of the  
10 conversation.

#### Summary of the Invention:

It is therefore an object of the present invention  
to provide a voice switching system which is capable of an  
appropriate switching to improve a quality of a conversation.

15 Other objects of the present invention will  
become clear as the description proceeds.

According to an aspect of the present invention,  
there is provided a voice switching system comprising:  
transmitting side attenuation means for attenuating a  
20 microphone input voice signal having a first level to produce  
a transmitting voice signal having a second level;  
receiving side attenuation means for attenuating a receiving  
voice signal having a third level to produce a speaker output  
voice signal having a fourth level; transmitting side  
25 control means for comparing the first level of the microphone  
input voice signal with the fourth level of the speaker output  
voice signal to obtain a primary difference therebetween, the  
transmitting side control means controlling, dependent on

the primary difference, an amount of attenuation of the microphone input voice signal in the transmitting side attenuation means; and receiving side control means for comparing the second level of the transmitting voice signal with the third level of the receiving voice signal to obtain a secondary difference therebetween, the receiving side control means controlling, dependent on the secondary difference, an amount of attenuation of the receiving voice signal in the receiving side attenuation means.

10 The receiving side control means may further comprise: a transmitting side signal delay buffer for providing the transmitting voice signal with a delay time, the delay time corresponding to a time for which the transmitting voice signal returns as the receiving voice  
15 signal through a communication line; a transmitting side signal power estimation section for estimating a signal power of the transmitting voice signal outputted from the transmitting side signal delay buffer; a receiving side signal power estimation section for estimating a signal power  
20 of the receiving voice signal; a first comparator for comparing a primary estimated signal power of the transmitting voice signal estimated by the transmitting side signal power estimation section with a secondary estimated signal power of the receiving voice signal estimated by the  
25 receiving side signal power estimation section to obtain a ratio therebetween; and a first attenuation amount calculation means for calculating an amount of attenuation in the receiving side attenuation means based on the ratio

outputted from the first comparator.

The receiving voice signal inputted to the receiving side signal power estimation section may be silent at the initial time when the transmitting voice signal is inputted to the transmitting side signal delay buffer.

The transmitting side control means may further comprise: a microphone input power estimation section for estimating a signal power of the microphone input voice signal; a speaker output signal delay buffer for providing the speaker output voice signal with a delay time, the delay time corresponding to a time for which a voice outputted from the speaker becomes the microphone input voice signal by a sound coupling with the microphone; a first speaker output power estimation section for estimating a signal power of the speaker output voice signal outputted from the speaker output signal delay buffer; a second comparator for comparing an estimated signal power of the microphone input voice signal estimated by the microphone input power estimation section with an estimated signal power of the speaker output voice signal estimated by the first speaker output power estimation section to obtain a ratio therebetween; and a second attenuation amount calculation means for calculating an amount of attenuation in the transmitting side attenuation means based on the ratio outputted from the second comparator.

The microphone input voice signal inputted to the microphone input power estimation section may be silent at the initial time when the speaker output voice signal is

inputted to the speaker output signal delay buffer.

According to another aspect of the present invention, there is provided a voice switching system of the type described, in which the transmitting side control means  
 5 may further comprise: a reverberation echo power estimation section for estimating a signal power of a reverberation echo signal obtained by the microphone input voice signal passing through a sound echo canceller; a second speaker output power estimation section for  
 10 estimating a signal power of the speaker output voice signal passing through the sound echo canceller; a third comparator for comparing an estimated signal power of the reverberation echo signal estimated by the reverberation echo power estimation section with an estimated signal power  
 15 of the speaker output voice signal estimated by the second speaker output power estimation section to obtain a ratio therebetween; and a third attenuation amount calculation means for calculating an amount of attenuation in the transmitting side attenuation means based on the ratio  
 20 outputted from the third comparator.

The sound echo canceller may sequentially renew an adaptive filter factor stored in an adaptive filter factor buffer by the use of the reverberation echo signal and a value of an adaptive filter tap input buffer, the reverberation  
 25 echo signal being outputted from a subtractor to which the microphone input voice signal is inputted, and wherein sum of products between the adaptive filter factor of the adaptive filter factor buffer and the value of the adaptive

filter tap input buffer is calculated in a sum of products operator, a result of the calculation being subtracted by the subtractor from the microphone input voice signal, thereby the reverberation echo signal being outputted.

5           Brief Description of the Drawings:

Fig. 1 is a block diagram for showing a conventional voice switching system;

Fig. 2 is a block diagram for showing a voice switching system according to a first embodiment of the  
10 present invention;

Fig. 3 is a block diagram for showing a reception side control section of the voice switching system illustrated in Fig. 2;

Fig. 4 is a characteristic diagram for showing a  
15 relation between a specific amount of attenuation of a reception voice power and that of a transmission voice power in an attenuation amount calculating section of the reception side control section illustrated in Fig. 3;

Fig. 5 is a block diagram for showing a  
20 transmission side control section of the voice switching system illustrated in Fig. 2;

Fig. 6 is a characteristic diagram for showing a relation between a specific amount of attenuation of a speaker output voice power and that of a microphone input  
25 voice power in the transmission side control section illustrated in Fig. 5;

Fig. 7 is a block diagram for showing a voice switching system according to a second embodiment of the



present invention; and

Fig. 8 is a block diagram for partially showing a sound echo canceller and a transmission side control section of the voice switching system illustrated in Fig. 7.

5 Detailed Description of the Preferred Embodiments:

Referring to Fig. 1, description is, at first made about a conventional voice switch in order to facilitate an understanding of the present invention.

Fig. 1 is a block diagram for showing a  
10 constitution of the conventional voice switch.

In Fig. 1, a receiving voice signal received from a side of a communication line is inputted into a receiving side attenuation section 101 and a control section 103. On the other hand, a microphone input voice signal gathered by  
15 a microphone 105 is inputted into the control section 103 and a transmitting side attenuation section 102. The control section 103 controls an amount of attenuation in the receiving side attenuation section 101 and the transmitting side attenuation section 102. By this control, the  
20 receiving side attenuation section 101 attenuates the receiving voice signal to make a voice be generated from a speaker 104. The speaker 104 enlarges the receiving voice all over a room. On the other hand, the transmitting side attenuation section 102 attenuates the microphone input  
25 voice signal inputted from the microphone 105 to make a transmitting voice signal be outputted to the side of the communication line.

With reference to Fig. 1 continued, description

is made as regards an operation of the conventional voice switch.

In Fig. 1, the control section 103 compares a level of the receiving voice signal with that of the microphone input voice signal inputted from the microphone 105. As a result of the comparison, the control section 103 controls the receiving side attenuation section 101 and the transmitting side attenuation section 102 so that either the receiving voice signal or the microphone input voice signal having a lower level may further be attenuated.

Herein, it is assumed that for example, a remote end speaker vocalizes, that the receiving voice signal is received, and that no voice signal is inputted into the microphone 105. The receiving voice signal is enlarged over the room by the speaker 104 through the receiving side attenuation section 101. The voice signal outputted from the speaker 104 turns to the microphone 105 to be again inputted thereinto. When a gain of sound coupling of the voice signal turning to the microphone 105 from the speaker 104 is smaller than a gain of the control section 103, it is determined in the control section 103 that an input level of the transmitting side is smaller than an input level of the receiving side. The control section 103 controls the transmitting side attenuation section 102 to make an amount of attenuation larger.

Next, it is also assumed that for example, a near end speaker vocalizes, that a voice signal is inputted into the microphone 105, and that no receiving voice signal is

received. The microphone input voice signal is transmitted through the transmitting side attenuation section 102. The transmitting voice signal thus transmitted returns as the receiving voice signal through a sound coupling between the speaker 104 and the microphone 105 at the remote end side. When a gain of the sound coupling between the speaker 104 and the microphone 105 is smaller than a gain of the receiving side attenuation section 101, it is determined in the control section 103 that an input level of the receiving side is smaller than an input level of the transmitting side. The control section 103 controls the receiving side attenuation section 101 to make an amount of attenuation larger.

However, in the conventional voice switch illustrated in Fig. 1, as mentioned in the preamble of the instant specification, an unmatched timing is inevitably caused to occur between a signal to be attenuated and a reference signal to which the control section 103 refers for determining an amount of attenuation, when a certain delay exists in a communication line, for example, in a case that a processing of voice encoding is inserted therein. A certain delay is also generated while a voice outputted from a speaker turns to a microphone to become an input voice of the microphone, for example, in a case that a signal buffer is inserted preceding the speaker output or following the microphone input. In the case, the unmatched timing is also caused to occur between the signal to be attenuated and the reference signal. An attenuation is inserted within a conversation at an inappropriate timing to deteriorate a

quality of the conversation.

Now, referring to Figs. 2 through 6, description will proceed to a voice switch according to a first embodiment of the present invention.

5 Fig. 2 is a block diagram for showing a constitution of the voice switch according to the first embodiment.

10 In Fig. 2, a receiving voice signal A transmitted from an unillustrated communication line is inputted into a receiving side attenuation section 1 and a receiving side control section 3a. A transmitting voice signal D attenuated by a transmitting side attenuation section 2 is also inputted into the receiving side control section 3a. The transmitting voice signal D is transmitted to the  
15 unillustrated communication line.

Thus, the receiving voice signal A and the transmitting voice signal D being inputted, the receiving side control section 3a compares a level of the receiving voice signal A and that of the transmitting voice signal D  
20 to detect a difference therebetween. Dependent on the difference thus detected, the receiving side control section 3a controls an amount of attenuation in the receiving side attenuation section 1. The receiving side attenuation section 1 attenuates the receiving voice signal A to produce  
25 a speaker output voice signal B. The speaker output voice signal B is transmitted to a speaker 4 and a transmitting side control section 3b. On the other hand, a voice spreading from the speaker 4 and a voice signal produced by a near end

speaker are gathered by a microphone 5 to produce a microphone input voice signal C. The microphone input voice signal C is inputted to the transmitting side attenuation section 2 and the transmitting side control section 3b. The transmitting side control section 3b compares a level of the microphone input voice signal C and that of the speaker output voice signal B to detect a difference therebetween. Dependent on the difference thus detected, the transmitting side control section 3b controls an amount of attenuation in the transmitting side attenuation section 2. The transmitting side attenuation section 2 produces the transmitting voice signal D. Attenuated by the transmitting side attenuation section 2, the transmitting voice signal D is transmitted to the unillustrated communication line.

Next, referring to Figs. 3 and 4, detailed description is made about the receiving side control section 3a illustrated in Fig 2.

Fig. 3 is a block diagram for showing an internal constitution of the receiving side control section 3a.

In Fig. 3, the receiving voice signal A is inputted to a receiving side signal power estimation section 32. On the other hand, the transmitting voice signal D is inputted to a transmitting side signal delay buffer 34. An output of the transmitting side signal delay buffer 34 is inputted to a transmitting side signal power estimation section 33. An output of the receiving side signal power estimation section 32 and an output of the transmitting side

signal power estimation section 33 are both inputted to a comparator 31 to be compared with each other. An output of the comparator 31 is inputted to an attenuation amount calculation section 30. The attenuation amount calculation section 30 outputs a receiving side attenuation amount F. The receiving side attenuation amount F is inputted to the receiving side attenuation section 1 illustrated in Fig. 2.

The receiving side signal power estimation section 32 estimates a voice signal power which is through the unillustrated communication line (lefthand side of Fig. 2) and which is produced by a remote end speaker. The receiving side signal power estimation section 32 outputs the estimated voice signal power to the comparator 31. The transmitting side signal power estimation section 33 estimates a voice signal power of the transmitting voice signal D which is delayed through the transmitting side signal delay buffer 34. The transmitting side signal power estimation section 33 outputs the estimated voice signal power to the comparator 31.

The comparator 31 compares the estimated voice signal power outputted from the receiving side signal power estimation section 32 with the estimated voice signal power outputted from the transmitting side signal power estimation section 33 to detect a ratio between the both estimated voice signal power. The ratio thus detected is outputted to the attenuation amount calculation section 30. The attenuation amount calculation section 30 calculates and produces a receiving side attenuation amount based on the ratio of the

both voice signal power inputted from the comparator 31.

A relation between the ratio and an output of the attenuation amount calculation section 30 is, for example, shown by a graph in Fig. 4. Fig. 4 shows the graph in which the ratio is depicted in a quadrature axis while the amount of attenuation is depicted in an axis of ordinates. As clearly shown in Fig. 4, the amount of attenuation becomes large when the ratio is small. On the contrary, the amount of attenuation becomes small when the ratio is large.

Further, referring to Figs. 5 and 6, detailed description is made as regards the transmitting side control section 3b illustrated in Fig. 2.

Fig. 5 is a block diagram for showing an internal constitution of the transmitting side control section 3b.

In Fig. 5, the speaker output voice signal B outputted from the receiving side attenuation section 1 in Fig. 2 is inputted to a speaker output signal delay buffer 44. The speaker output signal delay buffer 44 delays the speaker output voice signal B to be outputted to a speaker output power estimation section 43. The speaker output power estimation section 43 estimates a power of the speaker output voice signal B delayed by the speaker output signal delay buffer 44. The estimated power is outputted from the speaker output power estimation section 43 to the comparator 41. On the other hand, a microphone input voice signal C inputted from the microphone 5 illustrated in Fig. 2 is inputted to the microphone input power estimation section 42. The microphone input power estimation section 42 estimates

SECRET  
a voice signal power which is corresponding to the speaker  
4 and the microphone 5 illustrated in Fig. 2 and which is  
produced by a near end speaker. The microphone input power  
estimation section 42 outputs the estimated voice signal  
5 power to the comparator 41. The comparator 41 compares the  
estimated voice signal power of the speaker output voice  
signal B outputted from the speaker output power estimation  
section 43 with the estimated voice signal power produced by  
the near end speaker outputted from the microphone input  
10 power estimation section 42 to detect a ratio between the both  
estimated voice signal power. The ratio thus detected is  
outputted to the attenuation amount calculation section 40.  
The attenuation amount calculation section 40 calculates and  
produces a transmitting side attenuation amount based on the  
15 ratio of the both voice signal power inputted from the  
comparator 41. The transmitting side attenuation amount is  
outputted to the transmitting side attenuation section 2  
illustrated in Fig. 2.

A relation between the ratio and an output of the  
20 attenuation amount calculation section 40 is, for example,  
shown by a graph in Fig. 6. Fig. 6 shows the graph in which  
the ratio is depicted in a quadrature axis while the amount  
of attenuation is depicted in an axis of ordinates. As  
clearly shown in Fig. 6, the amount of attenuation becomes  
25 small when the ratio is small. On the contrary, the amount  
of attenuation becomes large when the ratio is large.

With reference to Figs. 2, 3 and 5 continued,  
description is made as regards an operation of the voice



switch according to the first embodiment of the present invention. First, a control of the receiving side attenuation section 1 is hereinafter described. Herein, it is assumed that the microphone input voice signal C gathered by the microphone 5 and outputted therefrom exists, and that the receiving voice signal A transmitted through the communication line does not exist, namely is silent. In this time, the microphone input voice signal C is inputted to the transmitting side control section 3b and the transmitting side attenuation section 2. Since the speaker output voice signal B is not inputted to the transmitting side control section 3b from the receiving side attenuation section 1, the transmitting side control section 3b outputs a small amount of transmitting side attenuation to the transmitting side attenuation section 2. As a result, the transmitting side attenuation section 2 scarcely attenuates any microphone input voice signal C but outputs the transmitting voice signal D to the communication line as a transmission signal. The transmitting voice signal D outputted to the communication line is subjected to a sound coupling with an unillustrated speaker and an unillustrated microphone at the remote end side. The transmitting voice signal D is returned as the receiving voice signal A through the communication line. In this case, it takes about several hundreds of milliseconds for the transmitting voice signal D to be returned as the receiving voice signal A through the communication line.

This returned receiving voice signal A is

inputted to the receiving side attenuation section 1 and the receiving side control section 3a. In the receiving side control section 3a illustrated in Fig. 3, the receiving voice signal A is inputted to a receiving side signal power estimation section 32. The receiving side signal power estimation section 32 estimates a signal power of the receiving voice signal A. Thus estimated signal power of the receiving voice signal A is outputted to the comparator 31. On the other hand, the transmitting voice signal D outputted from the transmitting side attenuation section 2 in Fig. 2 is inputted to the transmitting side signal delay buffer 34 of the receiving side control section 3a to be delayed therein. The delayed transmitting voice signal D is thereafter outputted to the transmitting side signal power estimation section 33. The transmitting side signal power estimation section 33 estimates a signal power of the transmitting voice signal D. The estimated signal power of the transmitting voice signal D is outputted to the comparator 31.

Accordingly, the comparator 31 compares a signal power of the receiving voice signal A and that of the transmitting voice signal D. In this comparison by the comparator 31, the delayed amount of the transmitting voice signal D by the transmitting side signal delay buffer 34 is adjusted to be equal to a delayed amount due to the communication line. In other words, the delayed amount of the transmitting voice signal D by the transmitting side signal delay buffer 34 is adjusted to be equal to the delayed

amount (In this example, several hundreds of milliseconds, as mentioned above) which is generated until the transmitting voice signal is subjected to sound coupling by the speaker and the microphone with a voice produced by a remote end speaker through the communication line and again returned as the receiving voice signal A through the communication line. When a gain of the sound coupling does not exceed "1", the comparator 31 outputs such a signal as increasing an amount of attenuation to the attenuation amount calculation section 30. The attenuation amount calculation section 30 outputs a large amount of receiving side attenuation F based on the output by the comparator 31, namely, based on a ratio between both the signal powers of the receiving voice signal A and the transmitting voice signal D. The large amount of receiving side attenuation F is outputted to the receiving side attenuation section 1 in Fig. 2. Therefore, the speaker output voice signal B outputted from the receiving side attenuation section 1 is never outputted as the receiving voice signal A which is corresponding to the transmitting voice signal D returned through the communication line. As a result, any voice of the receiving voice signal A is not outputted from the speaker 4.

Next, a control of the transmitting side attenuation section 2 is hereinafter described. Herein, it is assumed that the receiving voice signal A is inputted to the receiving side control section 3a through the communication line in Fig. 2, and that the microphone input voice signal C inputted through the microphone 5 is silent.

In this case, the receiving side control section 3a requests a small amount of attenuation to the receiving side attenuation section 1. Consequently, any receiving voice signal A is scarcely attenuated by the receiving side attenuation section 1 and is outputted therefrom to the speaker 4 and the transmitting side control section 3b as the speaker output voice signal B. The speaker output voice signal B supplied to the speaker 4 from the receiving side attenuation section 1 drives the speaker 4 to produce a voice. Through a sound coupling between the speaker 4 and the microphone 5, the voice turns from the speaker 4 to the microphone 5 as depicted by a dotted line in Fig. 2 to be a microphone input. From the production of the voice to the sound coupling by which the voice is gathered with the microphone 5, delay is inevitably caused to occur. On the other hand, the speaker output voice signal B is inputted to the transmitting side control section 3b illustrated in Fig. 5. The speaker output voice signal B is therein delayed by the speaker output signal delay buffer 44 to be inputted to the speaker output power estimation section 43. An amount of delay by the speaker output signal delay buffer 44 is adjusted to be equal to a delay time which is generated until the speaker output voice signal B is outputted from the speaker 4 as a voice and is gathered by the microphone 5 to be outputted as the microphone input voice signal C with a sound coupling between the speaker and the microphone.

After being delayed by the speaker output signal delay buffer 44, the speaker output voice signal B is inputted

to the speaker output power estimation section 43, as mentioned above. Therein, a signal power of the speaker output voice signal B is estimated. As a result, the estimated signal power of the speaker output voice signal B is inputted to the comparator 41. On the other hand, the microphone input voice signal C outputted from the microphone 5 is inputted to the microphone input power estimation section 42. Therein, a signal power of the microphone input voice signal C is estimated. As a result, the estimated signal power of the microphone input voice signal C is inputted to the comparator 41. Accordingly, the comparator 41 compares the estimated signal power of the speaker output voice signal B with the estimated signal power of the microphone input voice signal C.

In this comparison by the comparator 41, when a gain of the sound coupling between the speaker 4 and the microphone 5 does not exceed "1", the comparator 41 outputs such a signal as increasing an amount of attenuation to the attenuation amount calculation section 40. Based on the result of the comparison by the comparator 41, the attenuation amount calculation section 40 calculates a transmitting side attenuation amount E to be outputted to the transmitting side attenuation section 2. Accordingly, the transmitting side attenuation section 2 largely attenuates the microphone input voice signal C with reference to the transmitting side attenuation amount E. Therefore, even if a voice outputted from the speaker 4 turn to the microphone 5 and is gathered thereby, the voice is largely attenuated

by the transmitting side attenuation section 2. As a result, the microphone input voice signal C is never included in the transmitting voice signal D. Thus, in the voice switch according to the first embodiment, even if delay is generated in a communication line or delay is generated until a voice outputted from the speaker 4 turns to the microphone 5 to become a microphone input, the receiving side control section 3a and the transmitting side control section 3b are capable of adequate switching operations, respectively. Accordingly, a quality of conversation is so improved.

Referring to Figs. 7 and 8, description will proceed to a voice switch according to a second embodiment of the present invention.

Fig. 7 is a block diagram for showing a constitution of the voice switch according to the second embodiment.

As illustrated in Fig. 7, the voice switch according to the second embodiment has a structure similar to that of the first embodiment. Similar portions are designated by like reference numerals.

As will be clearly understood by comparing Fig. 7 with Fig. 2, a reference numeral 3c different from that of Fig. 2 is attached to a transmitting side control section in Fig. 7. Moreover, a sound echo canceller 6 is further provided in addition to the constitution of Fig. 2. A control of the transmitting side control section 3c is related to the sound echo canceller 6.

Namely, the speaker output voice signal B

outputted from the receiving side attenuation section 1 is not only outputted to the speaker 4 but also inputted to the transmitting side control section 3c through the sound echo canceller 6. On the other hand, the microphone input voice signal C outputted from the microphone 5 is also inputted to the sound echo canceller 6 to be outputted therefrom as a reverberation echo signal G. The reverberation echo signal G is supplied to both the transmitting side attenuation section 2 and the transmitting side control section 3c. Other portions are similar to those of the first embodiment illustrated in Fig. 2.

Referring to Fig. 8 with reference to Fig. 7 continued, description is made as regards the sound echo canceller 6 and the transmitting side control section 3c. Fig. 8 is a block diagram for showing internal constitutions of the sound echo canceller 6 and the transmitting side control section 3c.

As illustrated in Fig. 8, the transmitting side control section 3c comprises an attenuation amount calculation section 50, a comparator 51, a reverberation echo power estimation section 52, and a speaker output power estimation section 53. On the other hand, the sound echo canceller 6 comprises an adaptive filter 61 and a subtractor 65. The adaptive filter 61 comprises an adaptive filter tap input buffer 62, sum of products operator 63 and an adaptive filter factor buffer 64. The above-mentioned microphone input voice signal C outputted from the microphone 5 is inputted to the subtractor 65. Further, an output of the

sum of products operator 63 is also inputted to the subtractor 65.

As shown in Fig. 8, the reverberation echo signal G is outputted not only to the reverberation echo power estimation section 52 in the transmitting side control section 3c but also to the adaptive filter 61 in the sound echo canceller 6. The speaker output voice signal B outputted from the transmitting side attenuation section 1 illustrated in Fig. 7 is inputted to the adaptive filter tap input buffer 62. An output of the adaptive filter tap input buffer 62 is inputted to the speaker output power estimation section 53.

The adaptive filter 61 sequentially renews an adaptive filter factor stored in the adaptive filter factor buffer 64 by the use of the reverberation echo signal G and a value of the adaptive filter tap input buffer 62. The sum of products between the adaptive filter factor of the adaptive filter factor buffer 64 and the value of the adaptive filter tap input buffer 62 is calculated in the sum of products operator 63. A result of the calculation is outputted to the subtractor 65. The subtractor 65 subtracts the result of the calculation in the sum of products operator 63 from the microphone input voice signal C to produce the reverberation echo signal G. The speaker output power estimation section 53 estimates a signal power of the speaker output voice signal B. The estimated signal power of the speaker output voice signal B is outputted to the comparator 61. The reverberation echo signal G is inputted to the



reverberation echo power estimation section 52 in the transmitting side control section 3c. The comparator 51 compares a signal power of the speaker output voice signal 3 with a signal power of a voice of a near end speaker  
 5 outputted from the reverberation echo power estimation section 52 to detect a ratio therebetween. The ratio is outputted from the comparator 51 to the attenuation amount calculation section 50. The attenuation amount calculation section 50 calculate and decide an amount of transmitting  
 10 side attenuation based on the ratio inputted from the comparator 51. The amount of transmitting side attenuation is outputted to the transmitting side attenuation section 2 in Fig. 7.

In the second embodiment, the adaptive filter tap  
 15 input buffer 62 in Fig. 8 functions similarly to the speaker output signal delay buffer 44 in the first embodiment. Accordingly, the speaker output signal delay buffer 44 in the first embodiment can be replaced with the adaptive filter tap input buffer 62. With this structure, in which the voice  
 20 switch of the present invention is used together with the sound echo canceller 6, the speaker output signal delay buffer required for delaying the speaker output voice signal can be omitted. Further, with reference to a result of study of factors in the adaptive filter 61, an amount of delay of  
 25 the speaker output voice signal B can be controlled.

As described above, according to the present invention, a level of the speaker output voice signal and a level of the microphone input voice signal are compared with

each other in the transmitting side control section. Dependent on a difference between the both levels, the level of the microphone input voice signal is attenuated to obtain the transmitting voice signal. Further, a level of the  
5 receiving voice signal and a level of the transmitting voice signal are compared with each other in the receiving side control section. Dependent on a difference between the both levels, the level of the receiving voice signal is attenuated to obtain the speaker output voice signal. Therefore, even  
10 if a delay is generated until a voice outputted from the speaker turns to the microphone to become the microphone input voice signal, or even if a delay exists in the side of a communication line, switching operations can be carried out adequately. Accordingly, a quality of conversation can be  
15 further improved.

While the present invention has thus far been described in conjunction with only a preferred embodiment thereof, it will now be readily possible for one skilled in the art to put the present invention into effect in various  
20 other manners.

What is claimed is:

1. A voice switching system comprising:

transmitting side attenuation means for attenuating a microphone input voice signal having a first level to produce a transmitting voice signal having a second level;

receiving side attenuation means for attenuating a receiving voice signal having a third level to produce a speaker output voice signal having a fourth level;

transmitting side control means for comparing said first level of said microphone input voice signal with said fourth level of said speaker output voice signal to obtain a primary difference therebetween, said transmitting side control means controlling, dependent on said primary difference, an amount of attenuation of said microphone input voice signal in said transmitting side attenuation means; and

receiving side control means for comparing said second level of said transmitting voice signal with said third level of said receiving voice signal to obtain a secondary difference therebetween, said receiving side control means controlling, dependent on said secondary difference, an amount of attenuation of said receiving voice signal in said receiving side attenuation means.

2. A voice switching system as claimed in claim 1, said

receiving side control means further comprising:

a transmitting side signal delay buffer for providing said transmitting voice signal with a delay time, said delay time corresponding to a time for which said transmitting voice signal returns as said receiving voice signal through a communication line;

a transmitting side signal power estimation section for estimating a signal power of said transmitting voice signal outputted from said transmitting side signal delay buffer;

a receiving side signal power estimation section for estimating a signal power of said receiving voice signal;

a first comparator for comparing a primary estimated signal power of said transmitting voice signal estimated by said transmitting side signal power estimation section with a secondary estimated signal power of said receiving voice signal estimated by said receiving side signal power estimation section to obtain a ratio therebetween; and

a first attenuation amount calculation means for calculating an amount of attenuation in said receiving side attenuation means based on said ratio outputted from said first comparator.

3. A voice switching system as claimed in claim 2, wherein said receiving voice signal inputted to said receiving side signal power estimation section is silent at the initial time when said transmitting voice signal is inputted to said transmitting side signal delay buffer.

4. A voice switching system as claimed in claim 1, said transmitting side control means further comprising:

a microphone input power estimation section for estimating a signal power of said microphone input voice signal;

a speaker output signal delay buffer for providing said speaker output voice signal with a delay time, said delay time corresponding to a time for which a voice outputted from said speaker becomes said microphone input voice signal by a sound coupling with said microphone;

a first speaker output power estimation section for estimating a signal power of said speaker output voice signal outputted from said speaker output signal delay buffer;

a second comparator for comparing an estimated signal power of said microphone input voice signal estimated by said microphone input power estimation section with an estimated signal power of said speaker output voice signal estimated by said first speaker output power estimation section to obtain a ratio therebetween; and

a second attenuation amount calculation means for calculating an amount of attenuation in said transmitting side attenuation means based on said ratio outputted from said second comparator.

5. A voice switching system as claimed in claim 4, wherein said microphone input voice signal inputted to said microphone input power estimation section is silent at the initial time when said speaker output voice signal is

5 inputted to said speaker output signal delay buffer.

6. A voice switching system as claimed in claim 1, said transmitting side control means further comprising:

a reverberation echo power estimation section for estimating a signal power of a reverberation echo signal  
 5 obtained by said microphone input voice signal passing through a sound echo canceller;

a second speaker output power estimation section for estimating a signal power of said speaker output voice signal passing through said sound echo canceller;

10 a third comparator for comparing an estimated signal power of said reverberation echo signal estimated by said reverberation echo power estimation section with an estimated signal power of said speaker output voice signal estimated by said second speaker output power estimation  
 15 section to obtain a ratio therebetween; and

a third attenuation amount calculation means for calculating an amount of attenuation in said transmitting side attenuation means based on said ratio outputted from said third comparator.

20

7. A voice switching system as claimed in claim 6, wherein said sound echo canceller sequentially renews an adaptive filter factor stored in an adaptive filter factor buffer by the use of said reverberation echo signal and a value of an  
 5 adaptive filter tap input buffer, said reverberation echo signal being outputted from a subtractor to which said

670

1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 2679, 26

77:77 00 41 6661

## Abstract of the Disclosure:

In a voice switch, a receiving voice signal and a transmitting voice signal are inputted to a receiving side control section, the receiving side control section thereby produces a signal for controlling an amount of attenuation in a receiving side attenuation section. As a result, the receiving side attenuation section attenuates the receiving voice signal by a predetermined amount to produce a speaker output voice signal for driving a speaker. A speaker output voice signal and a microphone input voice signal are inputted to a transmitting side control section, the transmitting side control section thereby produces a signal for controlling an amount of attenuation in a transmitting side attenuation section. Consequently, the transmitting side attenuation section attenuates the speaker output voice signal by a predetermined amount to produce the transmitting voice signal.

2025-10-10 10:10:10



A block diagram of a signal processing system. An input signal enters from the left and splits into two paths. The upper path goes through block 101 to a speaker 104. The lower path goes through block 103 to block 102. Block 102 has two outputs: one goes left and another goes up through block 103 to block 101. A microphone 105 is connected to block 102 and also has a feedback path (indicated by a dotted arrow) that goes back to block 103.

1999年 12月 01 22:24

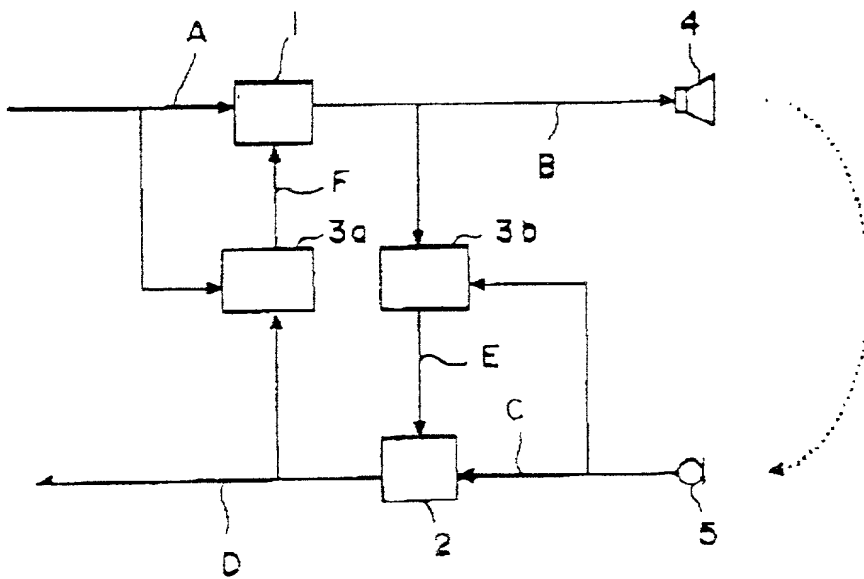


FIG 2

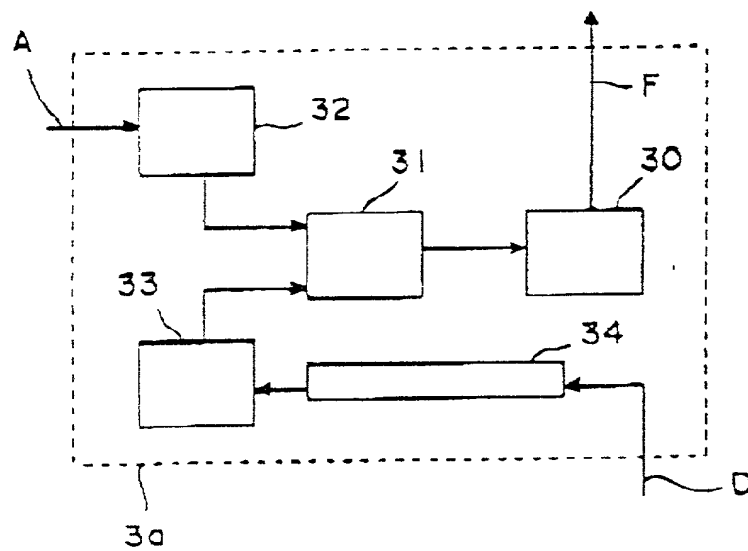


FIG 3

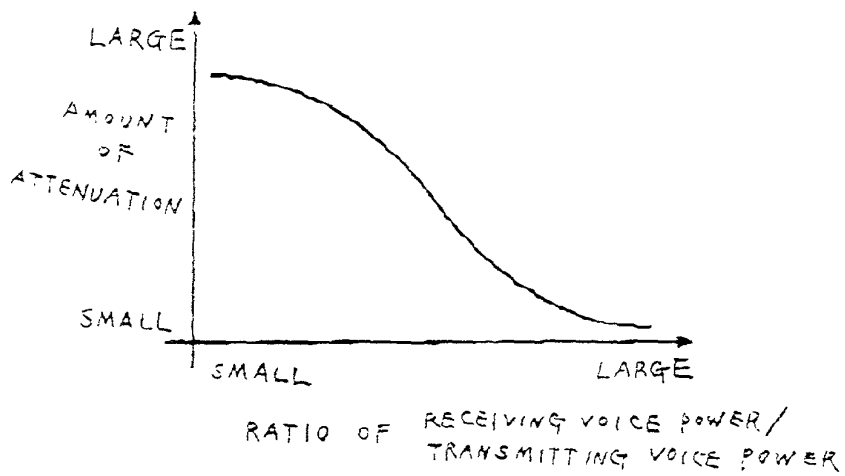


FIG 4

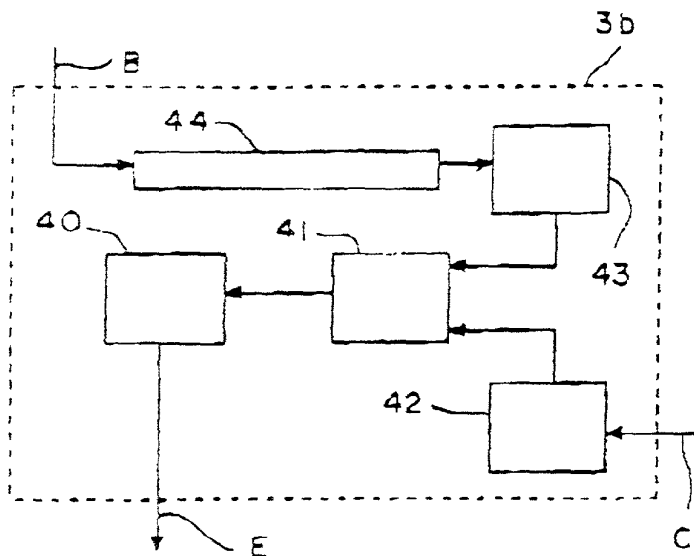


FIG 5

AMOUNT OF ATTENUATION

LARGE

SMALL

SMALL

LARGE

RATIO OF SPEAKER OUTPUT VOICE POWER / MICROPHONE INPUT VOICE POWER

F I G 6

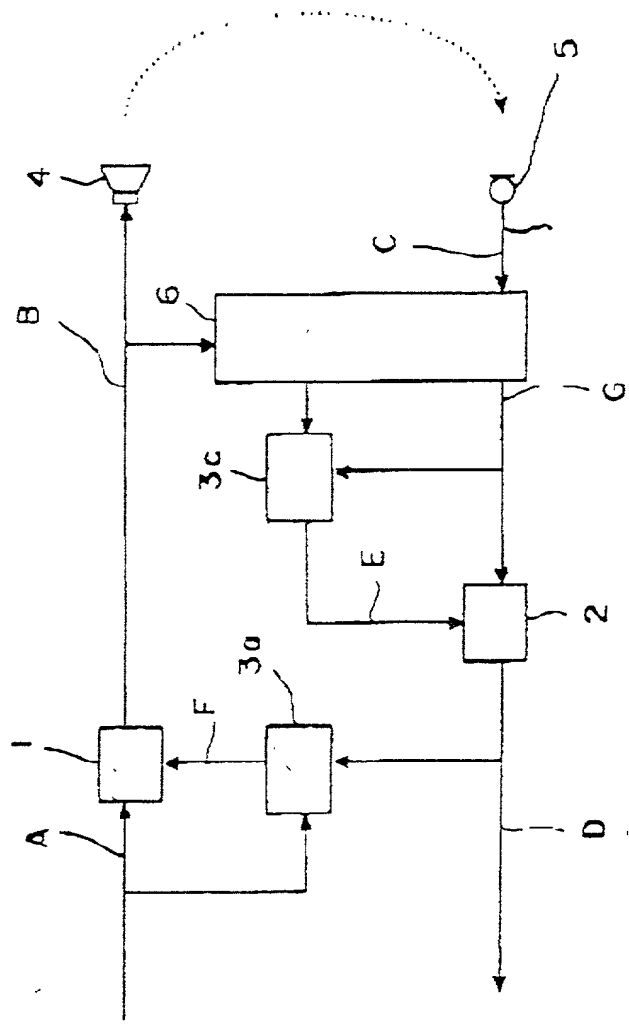


FIG 7

66740-1532260

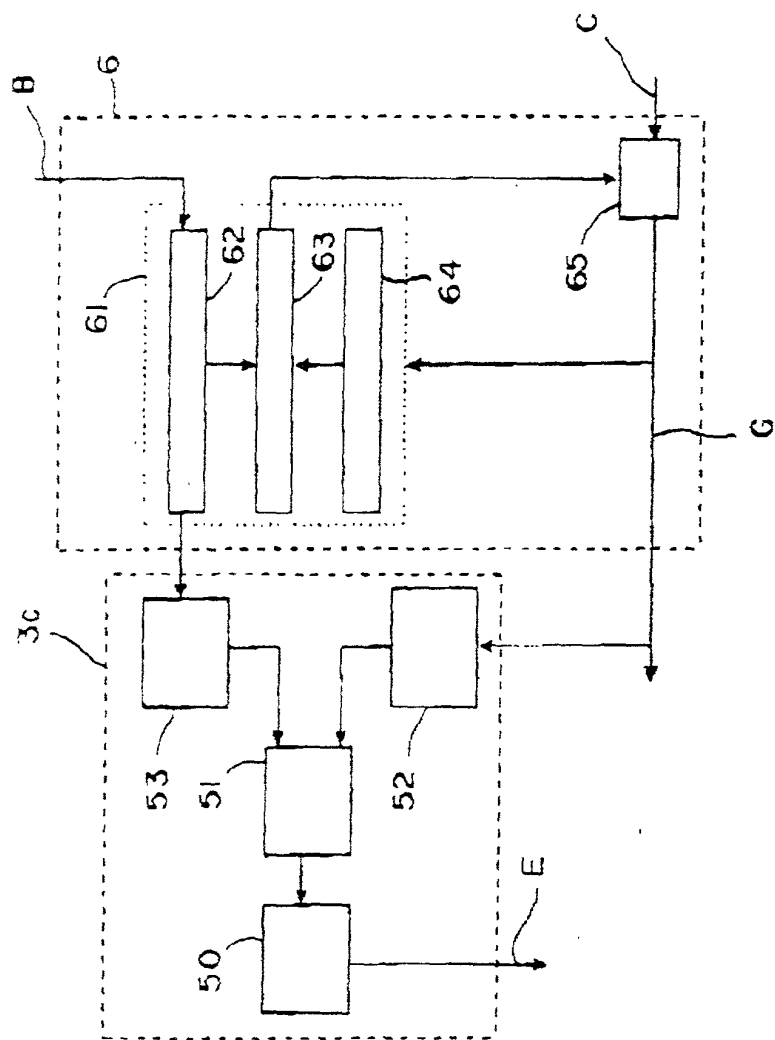



FIG 8

UNITED STATES OF AMERICA		OFGS FILE NO.																	
COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION		P/3281-5																	
<p>As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:</p> <p style="text-align: center;"><b>VOICE SWITCHING SYSTEM CAPABLE OF IMPROVING A QUALITY OF CONVERSATION</b></p>																			
<p>the specification of which is attached hereto, unless the following box is checked:</p> <p><input type="checkbox"/> was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).</p>																			
<p>I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.</p> <p>I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.</p> <p>I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:</p>																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 25%;">COUNTRY</th> <th style="width: 25%;">APPLICATION NUMBER</th> <th style="width: 25%;">DATE OF FILING (day, month, year)</th> <th style="width: 25%;">PRIORITY CLAIMED UNDER 35 U.S.C. 119</th> </tr> <tr> <td>Japan</td> <td>015122/1998</td> <td>09/01/1998</td> <td>YES <input checked="" type="checkbox"/> NO <input type="checkbox"/></td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td>YES <input type="checkbox"/> NO <input type="checkbox"/></td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td>YES <input type="checkbox"/> NO <input type="checkbox"/></td> </tr> </table>				COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119	Japan	015122/1998	09/01/1998	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>				YES <input type="checkbox"/> NO <input type="checkbox"/>				YES <input type="checkbox"/> NO <input type="checkbox"/>
COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119																
Japan	015122/1998	09/01/1998	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>																
			YES <input type="checkbox"/> NO <input type="checkbox"/>																
			YES <input type="checkbox"/> NO <input type="checkbox"/>																
<p>I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.</p>																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 30%;">UNITED STATES APPLICATION NUMBER</th> <th style="width: 30%;">DATE OF FILING (day, month, year)</th> <th style="width: 40%;">STATUS (patented, pending, abandoned)</th> </tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </table>				UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)													
UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)																	
<p>I hereby appoint OSTROLENK, FABER, GERB &amp; SOFFEN, and the members of the firm, Marvin C. Soffen - Reg. No. 17,542; Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,643; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberman - Reg. No. 22,400; Steven I. Weishard - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944 and Louis C. Dujmich - Reg. No. 30,635, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent &amp; Trademark Office connected therewith and to receive all correspondence.</p>																			
<p>SEND CORRESPONDENCE TO: OSTROLENK, FABER, GERB &amp; SOFFEN 1130 AVENUE OF THE AMERICAS NEW YORK, NEW YORK 10036-3403</p> <p style="text-align: right;">DIRECT TELEPHONE CALLS TO: (212) 382-0700</p>																			
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p>																			
<p>FULL NAME OF FIRST OR FIRST INVENTOR</p> <p><b>YOSHIHIRO ONO</b></p>		<p>INVENTOR'S SIGNATURE</p> <p><i>Yoshihiro Ono</i> </p>																	
<p>RESIDENCE</p> <p>Tokyo, Japan</p>		<p>DATE</p> <p>January 6, 1999</p>																	
<p>POST OFFICE ADDRESS</p> <p>c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan.</p>																			
<p>FULL NAME OF SECOND JOINT INVENTOR (IF ANY)</p>		<p>INVENTOR'S SIGNATURE</p>																	
<p>RESIDENCE</p>		<p>DATE</p>																	
<p>COUNTRY OF CITIZENSHIP</p> <p>Japan</p>																			
<p>POST OFFICE ADDRESS</p>																			
<p>FULL NAME OF THIRD JOINT INVENTOR (IF ANY)</p>		<p>INVENTOR'S SIGNATURE</p>																	
<p>RESIDENCE</p>		<p>DATE</p>																	
<p>COUNTRY OF CITIZENSHIP</p>																			
<p>POST OFFICE ADDRESS</p>																			

☐ CONTINUED ON PAGE 2